


- ▶ Voltage monitoring in 3-phase and 1-phase mains
- ▶ Multifunction
- ▶ Monitoring of phase failure
- ▶ Monitoring of phase sequence selectable
- ▶ Connection of neutral wire optional
- ▶ 1 change over contact
- ▶ Width 17.5 mm
- ▶ Installation design

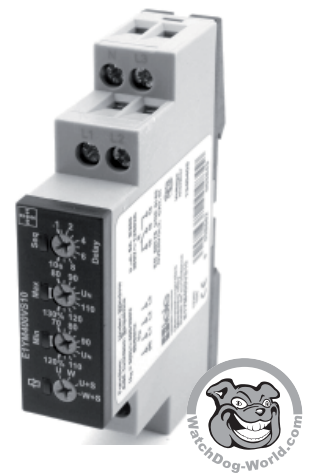

## Technical data

### 1. Functions

Voltage monitoring in 3-phase and 1-phase mains with adjustable thresholds, adjustable tripping delay, monitoring of phase sequence and phase failure and the following functions (selectable by means of rotary switch):

UNDER	Undervoltage monitoring
UNDER+SEQ	Undervoltage monitoring and monitoring of phase sequence
WIN	Monitoring the window between Min and Max
WIN+SEQ	Monitoring the window between Min and Max and monitoring of phase sequence

### 2. Time ranges

Start-up suppression time:	Adjustment range
Tripping delay:	- 0.1s 10s

### 3. Indicators

Red LED ON/OFF:	indication of failure of the corresponding threshold
Red LED flashes:	indication of tripping delay of the corresponding threshold
Yellow LED ON/OFF:	indication of relay output

### 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40  
 Mounted on DIN-rail TS 35 according to EN 50022  
 Mounting position: any  
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20  
 Tightening torque: max. 1Nm  
 Terminals capacity:  
 1 x 0.5 to 2.5mm<sup>2</sup> with/without multicore cable end  
 1 x 4mm<sup>2</sup> without multicore cable end  
 2 x 0.5 bis 1.5mm<sup>2</sup> with/without multicore cable end  
 2 x 2.5mm<sup>2</sup> flexible without multicore cable end

### 5. Input circuit

Supply voltage:	(=measured voltage)
Terminals:	(N)-L1-L2-L3
Rated voltage Un:	see table ordering information or printing on the unit
Tolerance:	-30% to +30% of Un
Rated consumption:	8VA (1W)
Rated frequency:	AC 48 bis 63Hz
Duty cycle:	100%
Reset time:	500ms
Hold-up time:	-
Drop out voltage:	>20% of supply voltage
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

### 6. Output circuit

1 potential free change over contact	
Rated voltage:	250V AC
Switching capacity:	1250VA (5A / 250V)
Fusing:	5A fast acting
Mechanical life:	20 x 10 <sup>6</sup> operations
Electrical life:	20 x 10 <sup>5</sup> operations at 1000VA resistive load max. 60/min at 100VA resistive load max. 6/min at 1000VA resistive load (according to IEC 947-5-1)
Switching capacity:	III. (according to IEC 60664-1)
Overvoltage category:	4kV
Rated surge voltage:	

### 7. Measuring circuit

Measuring variable:	3(N)~, sinus, 48 to 63Hz (=supply voltage)
Measuring input:	(N)-L1-L2-L3
Terminals:	determined by tolerance specified for supply voltage
Overload capacity:	-
Input resistance:	-
Switching threshold:	
Max:	80%...130% of U <sub>N</sub>
Min:	70%...120% of U <sub>N</sub>
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

### 8. Accuracy

Base accuracy:	±5% of maximum scale value
Adjustment accuracy:	≤5% of maximum scale value
Repetition accuracy:	≤2%
Voltage influence:	-
Temperature influence:	≤1%

### 9. Ambient conditions

Ambient temperature:	-25 to +55°C (according to IEC 68-1)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (according to IEC 721-3-3 class 3K3)
Pollution degree:	2, if built in 3 (according to IEC 664-1)
Vibration resistance:	10 to 55 Hz 0.35mm (according to IEC 68-2-6)
Shock resistance:	15g 11ms (according to IEC 68-2-27)

### 10. Weight


Single packing:	72g
Packing of 10pcs:	670g per Package

## Functions

For all functions the LED's Min and Max are flashing alternating (the relay is fallen off), when the minimum value for the measured voltage was chosen to be greater than the maximum value. If a failure already exists when the device is activated, the output relay remains in off-position and the LED for the corresponding threshold is illuminated. The device includes separately every phase voltage (L-N) and monitors it according to the selected function (UNDER or WINDOW).


### Undervoltage monitoring (UNDER, UNDER+SEQ)

When the measured voltage (one of the phase voltages) falls below the value adjusted at the Min-regulator, the set interval of the tripping delay (Delay) begins (red LED Min flashes). After the interval has expired (red LED Min illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R switches into on-position again (yellow LED illuminated), when the measured voltage (all phase voltages) exceeds the value adjusted at the Max-regulator.

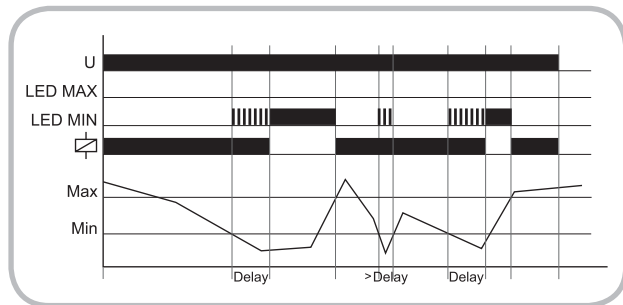

### Windowfunction (WIN, WIN+SEQ)


The output relay R switches into on-position (yellow LED illuminated), when the measured voltage (all phase voltages) exceeds the value adjusted at the Min-regulator. When the measured voltage (one of the phase voltages) exceeds the value adjusted at the Max-regulator, the set interval of tripping delay (Delay) begins (red LED Max flashes). After the interval has expired (red LED Max illuminated) the output relay R switches into off-position (yellow LED not illuminated). The output relay switches into on-position again (yellow LED illuminated) when the measured voltage falls below the value adjusted at the Max-regulator (red LED Max not illuminated). When the measured voltage (one of the phase voltage) falls below the value adjusted at the Min-regulator, the set interval of tripping delay (Delay) begins again (red LED Min flashes). After the interval has expired (red LED Min illuminated), the output relay R switches into off-position (yellow LED not illuminated).

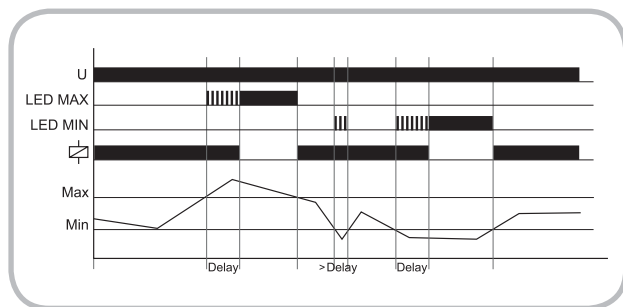

### Phase sequence monitoring (SEQ)

Phase sequence monitoring is selectable for all functions. In single phase circuit, the phase sequence monitoring must be disconnected.


If a change in phase sequence is detected (red LED SEQ illuminated), the output relay R switches into off-position after the set interval of tripping delay (Delay) has expired (yellow LED not illuminated).

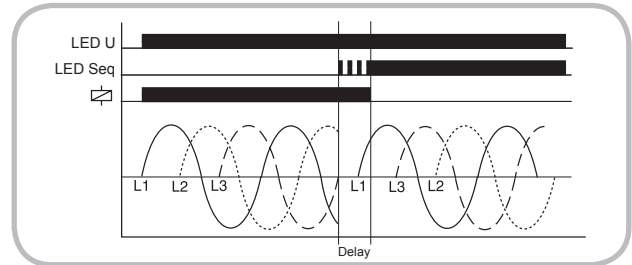



### Neutral wire break

The device monitors every phase (L1, L2 and L3) against the neutral wire N.


A shift of neutral point occurs by an asymmetrical phase load if the neutral wire breaks in the power line. If one of the phase voltages exceeds the value adjusted at the trip point, the set interval of tripping delay (Delay) begins (red LED Min or Max flashes). After the interval has expired (red LED Min or Max illuminated), the output relay switches into off-position (yellow LED not illuminated).

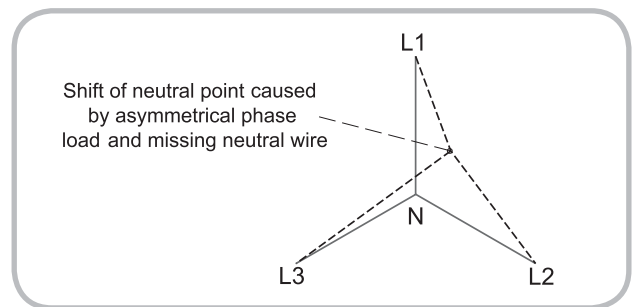

## Connections

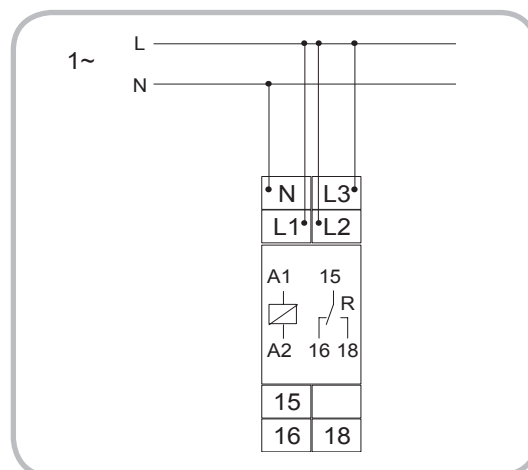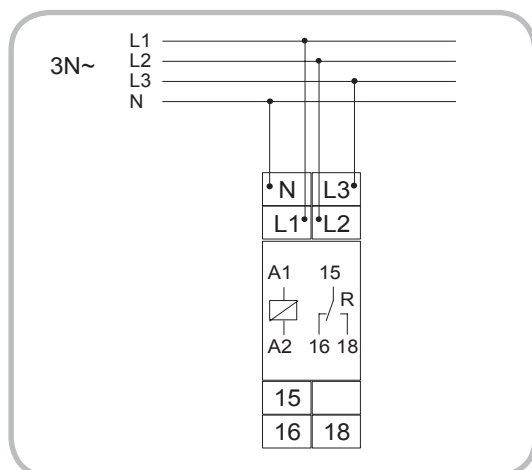

## Dimensions

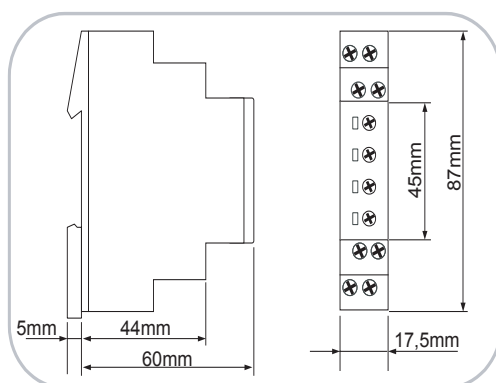

## Ordering informations

Types	Rated voltage Un	Part Nr. (PQ 1)	Part Nr. (PQ 10)
E1YM400VS10	3(N)~400/230V	1340405	-